

## Series DL Tubular Air Duct Heaters

**Series DL Tubular** Air Duct Heaters feature stainless steel elements, stainless steel element support, painted steel support rods & flange, NEMA 1 terminal enclosure, and replaceable element design.


**Low temperature (500°F max.)**

### Recommended Operating Conditions

Air Speed (ft. per second)	Maximum Operating Temp.
5	300°F
10	400°F
15	500°F

### Features:

- 30 watts per sq. inch on sheath
- Stainless steel elements – 1200°F max. sheath temperature
- Stainless steel element support
- Painted steel support rods & flange
- NEMA 1 terminal enclosure
- Recompacted bends
- Replaceable element design
- CSA certified with NEMA 1 Housing

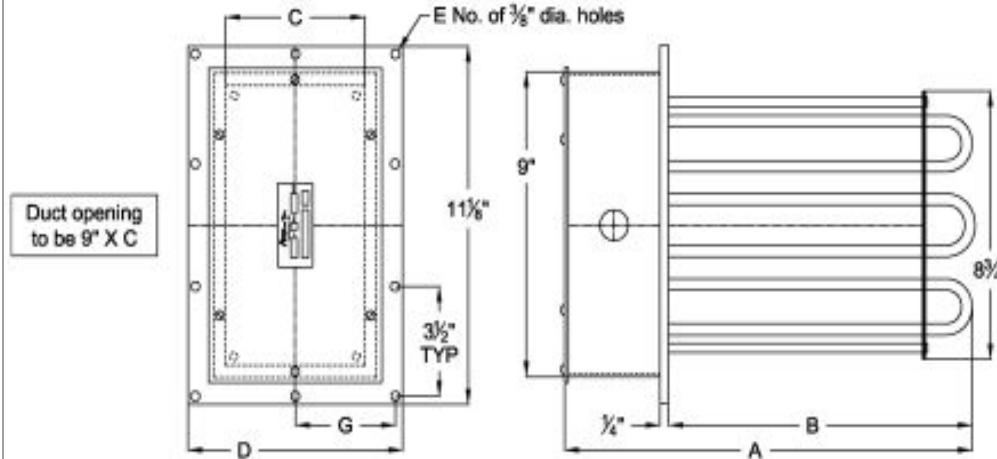

Volts 3-Phase	# Circuits	KW	A	B	C	D	E	G	Wt. (lbs.)	# Elems.	Catalog #
240 480	$\frac{1}{1}$	4.5	24 $\frac{5}{8}$	20 $\frac{3}{8}$	2 $\frac{5}{8}$	4 $\frac{5}{8}$	8	4	15	3	DL3-4-3 DL3-4-5
240 480	$\frac{1}{1}$	9	24 $\frac{5}{8}$	20 $\frac{3}{8}$	3 $\frac{5}{8}$	5 $\frac{5}{8}$	10	2 $\frac{1}{2}$	20	6	DL6-9-3 DL6-9-5
240 480	$\frac{1}{1}$	18	24 $\frac{5}{8}$	20 $\frac{3}{8}$	5 $\frac{5}{8}$	7 $\frac{5}{8}$	10	3 $\frac{1}{2}$	25	12	DL12-18-3 DL12-18-5
240 480	$\frac{2}{1}$	27	24 $\frac{5}{8}$	20 $\frac{3}{8}$	7 $\frac{5}{8}$	9 $\frac{5}{8}$	12	3	35	18	DL18-27-3 DL18-27-5
240 480	$\frac{2}{1}$	36	24 $\frac{5}{8}$	20 $\frac{3}{8}$	9 $\frac{5}{8}$	11 $\frac{5}{8}$	14	2 $\frac{3}{4}$	41	24	DL24-36-3 DL24-36-5
240 480	$\frac{2}{2}$	45	24 $\frac{5}{8}$	20 $\frac{3}{8}$	11 $\frac{5}{8}$	13 $\frac{5}{8}$	14	3 $\frac{1}{4}$	50	30	DL30-45-3 DL30-45-5
240 480	$\frac{3}{2}$	54	24 $\frac{5}{8}$	20 $\frac{3}{8}$	13 $\frac{5}{8}$	15 $\frac{5}{8}$	14	3 $\frac{1}{4}$	60	36	DL36-54-3 DL36-54-5
240 480	$\frac{2}{1}$	63	24 $\frac{5}{8}$	20 $\frac{3}{8}$	15 $\frac{5}{8}$	17 $\frac{5}{8}$	14	4 $\frac{1}{4}$	70	42	DL42-63-3 DL42-63-5
240 480	$\frac{4}{2}$	72	24 $\frac{5}{8}$	20 $\frac{3}{8}$	17 $\frac{5}{8}$	19 $\frac{5}{8}$	14	4 $\frac{3}{4}$	80	48	DL48-72-3 DL48-72-5