




# SOUTHEAST THERMAL SYSTEMS

WWW.SETHERMAL.COM

SALES@SEETHERMAL.COM

phone: 704-399-4248

## *CARTRIDGE INSERTION HEATER APPLICATION*

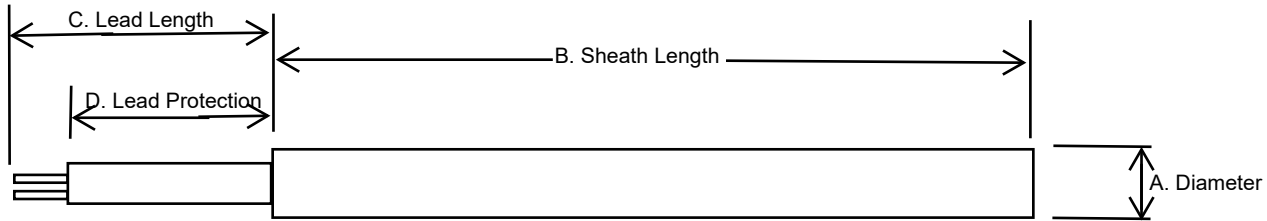

- A. Diameter: \_\_\_\_\_ Inches (standard Tolerance  $\pm .002"$ )  
 B. Sheath Length: \_\_\_\_\_ Inches (standard Tolerance  $\leq 4.5"$  length  $\pm 3/32"$ ,  $> 4.5"$  length  $\pm 2\%$ )

### TERMINATION:

- Internally Connected     Right Angle Leads     Teflon Cap & Leads     Thread Terminals  
 Straight Braid     R/A Braid     With Flange     Copper Coupler  
 Straight Armor Cable     R/A Armor Cable     Locater Ring     Right Angle Copper Coupler

- C. Lead Length: \_\_\_\_\_ Inches  
 D. Lead Protection: \_\_\_\_\_ Inches  
 E. Full length Ground Wire?  YES  NO

- F. RATING:  
 Watts: \_\_\_\_\_ Volts \_\_\_\_\_  
 Integral Thermocouple?  NO  YES if YES:  Type J  Type K  
 Grounded  Ungrounded

- G. TERMINAL SEAL:  
 None     Epoxy 300°F     Epoxylite 600°F     RTV 450°F     Other (Specify): \_\_\_\_\_

- H. Agency Approvals:  
 None     CE     CSA     UL Recognized     Other (Specify): \_\_\_\_\_

- I. Other Special Features (3 Phase, Centerless Grind, Wattage Distributions, Plugs, ETC.):

---



---