




SOUTHEAST THERMAL SYSTEMS

WWW.SETHERMAL.COM

SALES@SETHERMAL.COM

phone: 704-399-4248

CARTRIDGE INSERTION HEATER APPLICATION

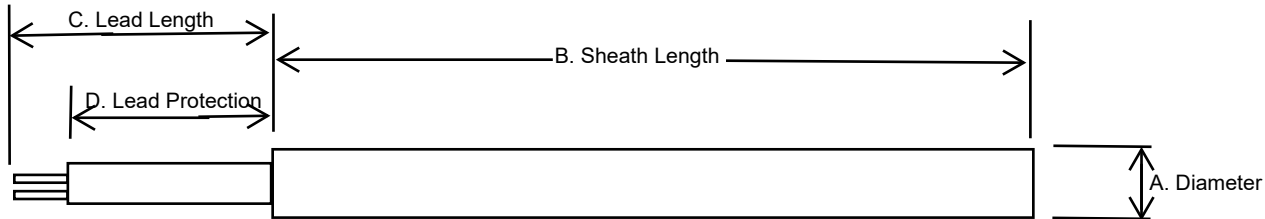

A. Diameter: _____ Inches (standard Tolerance $\pm .002"$) _____ mm
B. Sheath Length: _____ Inches (standard Tolerance $\leq 4.5"$ length $\pm 3/32"$, $> 4.5"$ length $\pm 2\%$) _____ mm

TERMINATION:

- | | | | | |
|--|--|---|--|--|
| ☐ Fiberglass Leads (482°F/250°C) | ☐ Internally Connected | ☐ Right Angle Leads | ☐ Teflon Cap & Leads | ☐ Thread Terminals |
| ☐ High Temp. Fiberglass (932°F/500°C) | ☐ Straight Braid | ☐ R/A Braid | ☐ With Flange | ☐ Copper Coupler |
| ☐ Teflon Leads (500°F/260°C) | ☐ Straight Armor Cable | ☐ R/A Armor Cable | ☐ Locater Ring | ☐ Right Angle Copper Coupler |
| ☐ Mica Tape w/sleeve leads over both (850°F) | | | | |

C. Lead Length: _____ Inches _____ mm
D. Lead Protection: _____ Inches _____ mm

Full length Ground Wire? ☐ YES ☐ NO

RATING:

Watts: _____ Volts _____ Wattage Distribution: ☐ YES ☐ NO if YES specify _____
1 Phase 3 Phase

Integral Thermocouple? ☐ NO ☐ YES if YES: ☐ T type J ☐ T type K ☐ Grounded ☐ Ungrounded

TERMINAL SEAL:

☐ None ☐ Epoxy 300°F ☐ Epoxylite 600°F ☐ RTV 450°F ☐ Other (Specify): _____

AGENCY APPROVALS:

☐ None ☐ CE ☐ CSA ☐ UL Recognized ☐ Other (Specify): _____

Process Temperature: _____ °F or _____ °C

OPTIONS:

Centerless Grind

Other Special Features:

