

Tubular Heater Product Data Sheet

Diameter: 0.250" ☐ 0.312" ☐ 0.375" ☐

0.475" ☐ 0.625" ☐ Other _____

Sheath Material: incoloy ☐ stainless steel ☐

steel ☐ Copper ☐ Other _____

Sheath Length: _____ in **EHL:** _____ in

Cold Ends: _____ inches

Rating: Watts: _____ Volts _____

Configuration: Formed ☐ Straight ☐ Triangulated ☐

Formed Type: _____ (Type 1-32, see below)

Dimensions: _____ or include sketch

Bushings: Yes ☐ Specify Thread Size: ☐

Termination: 10-32 Terms. ☐ 8-32 Terms. ☐

Flag Term Straight ☐ Flag Term. Side Projection ☐

Flag Term. Right Angle projection ☐

Quick-Connect Straight ☐

Quick-Conn Side Projection ☐

Lead Wire ☐ Rubber-molded leads ☐

Lead Length: _____

Terminal Seals: : None ☐ RTV (450 °F) ☐ Other _____

Epoxy (300 °F) ☐ Epoxylite (600 °F) ☐ Hermetic Seal ☐

Agency Approvals: None ☐ U.L. Recognized ☐

C.S.A Certified ☐ CE ☐ Other (specify): _____

Special Features: (Fins, Single Ended, Mounting Flanges, etc.)

Operating Conditions:

Application: (describe in detail) _____


Heated Medium: Air ☐

Other (specify) _____

Application Temperature: _____ °F

Ambient Temperature: _____ °F

Approval Drawing Required: ☐

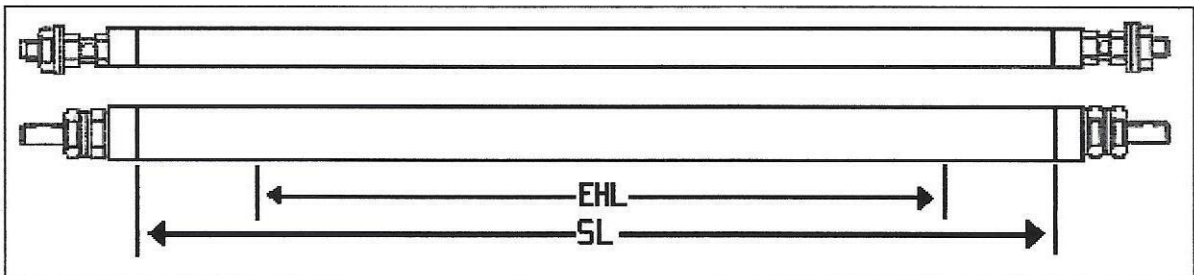

Email completed form to: sales@sethermal.com

Tubular Heaters

FIG. 1




FIG. 2




FIG. 3




FIG. 4




FIG. 5




FIG. 6




FIG. 7




FIG. 8

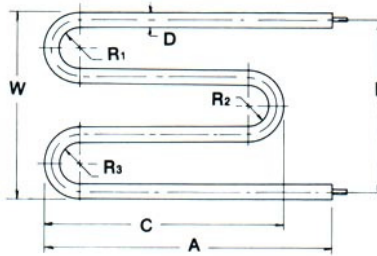


FIG. 9




FIG. 10




FIG. 11

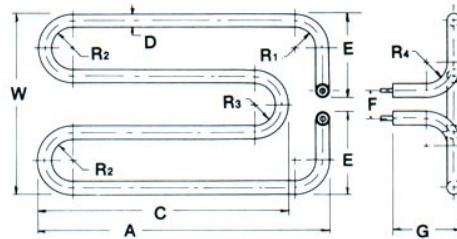


FIG. 12

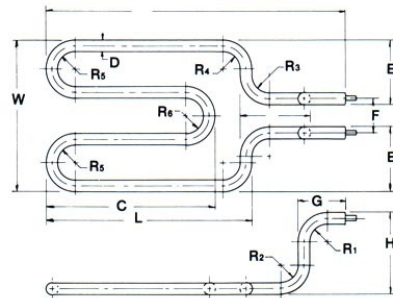


FIG. 13




FIG. 14




FIG. 15





FIG. 16



Tubular Heaters

